



Low Cost DDR Phase Lock Loop Clock Driver

Recommended Application:

DDR Clock Driver


Product Description/Features:

- Low skew, low jitter PLL clock driver
- I²C for functional and output control
- Feedback pins for input to output synchronization
- Spread Spectrum tolerant inputs

Switching Characteristics:

- PEAK - PEAK jitter (66MHz): <120ps
- PEAK - PEAK jitter (>100MHz): <75ps
- CYCLE - CYCLE jitter (>100MHz): <50ps
- OUTPUT - OUTPUT skew: <100ps
- Output Rise and Fall Time: 650ps - 950ps
- DUTY CYCLE: 45% - 50%

Pin Configuration

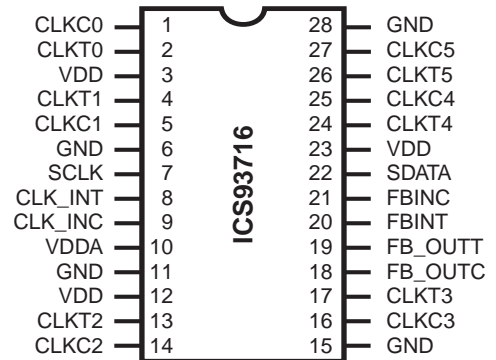


28-Pin SSOP and TSSOP

Functionality

| AVDD | INPUTS | | OUTPUTS | | | | PLL State |
|------------|-----------------------|---------|---------|------|---------|---------|-----------|
| | CLK_INT | CLK_INC | CLKT | CLKC | FB_OUTT | FB_OUTC | |
| 2.5V (nom) | L | H | L | H | L | H | on |
| 2.5V (nom) | H | L | H | L | H | L | on |
| 2.5V (nom) | <20MHz ⁽¹⁾ | | Z | Z | Z | Z | off |

Block Diagram

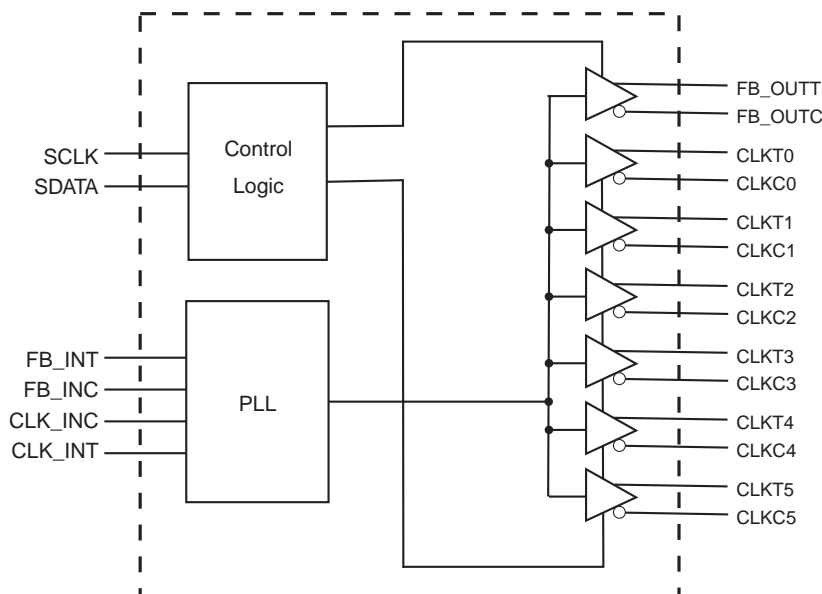



Pin Descriptions

| PIN NUMBER | PIN NAME | TYPE | DESCRIPTION |
|----------------------|-----------|------|--|
| 6, 11, 15, 28 | GND | PWR | Ground |
| 27, 25, 16, 14, 5, 1 | CLKC(5:0) | OUT | "Complementary" clocks of differential pair outputs. |
| 26, 24, 17, 13, 4, 2 | CLKT(5:0) | OUT | "True" Clock of differential pair outputs. |
| 3, 12, 23 | VDD | PWR | Power supply 2.5V |
| 7 | SCLK | IN | Clock input of I ² C input, 5V tolerant input |
| 8 | CLK_INT | IN | "True" reference clock input |
| 9 | CLK_INC | IN | "Complementary" reference clock input |
| 10 | VDDA | PWR | Analog power supply, 2.5V |
| 18 | FB_OUTC | OUT | "Complementary" Feedback output, dedicated for external feedback. It switches at the same frequency as the CLK. This output must be wired to FB_INC. |
| 19 | FB_OUTT | OUT | "True" " Feedback output, dedicated for external feedback. It switches at the same frequency as the CLK. This output must be wired to FB_INT. |
| 20 | FB_INT | IN | "True" Feedback input, provides feedback signal to the internal PLL for synchronization with CLK_INT to eliminate phase error. |
| 21 | FB_INC | IN | "Complementary" Feedback input, provides signal to the internal PLL for synchronization with CLK_INC to eliminate phase error. |
| 22 | SDATA | IN | Data input for I ² C serial input, 5V tolerant input |



Byte 0: Output Control
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|-------|--------|-----|--------------|
| Bit 7 | 2, 1 | 1 | CLKT0, CLKC0 |
| Bit 6 | 4, 5 | 1 | CLKT1, CLKC1 |
| Bit 5 | - | 1 | Reserved |
| Bit 4 | - | 1 | Reserved |
| Bit 3 | 13, 14 | 1 | CLKT2, CLKC2 |
| Bit 2 | 26, 27 | 1 | CLKT5, CLKC5 |
| Bit 1 | - | 1 | Reserved |
| Bit 0 | 24, 25 | 1 | CLKT4, CLKC4 |

Byte 1: Output Control
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|-------|--------|-----|--------------|
| Bit 7 | - | 1 | Reserved |
| Bit 6 | 17, 16 | 1 | CLKT3, CLKC3 |
| Bit 5 | - | 1 | Reserved |
| Bit 4 | - | 1 | Reserved |
| Bit 3 | - | 1 | Reserved |
| Bit 2 | - | 1 | Reserved |
| Bit 1 | - | 1 | Reserved |
| Bit 0 | - | 1 | Reserved |

Byte 2: Reserved
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|-------|------|-----|-------------|
| Bit 7 | - | 1 | Reserved |
| Bit 6 | - | 1 | Reserved |
| Bit 5 | - | 1 | Reserved |
| Bit 4 | - | 1 | Reserved |
| Bit 3 | - | 1 | Reserved |
| Bit 2 | - | 1 | Reserved |
| Bit 1 | - | 1 | Reserved |
| Bit 0 | - | 1 | Reserved |

Byte 3: Reserved
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|-------|------|-----|-------------|
| Bit 7 | - | 1 | Reserved |
| Bit 6 | - | 1 | Reserved |
| Bit 5 | - | 1 | Reserved |
| Bit 4 | - | 1 | Reserved |
| Bit 3 | - | 1 | Reserved |
| Bit 2 | - | 1 | Reserved |
| Bit 1 | - | 1 | Reserved |
| Bit 0 | - | 1 | Reserved |

Byte 4: Reserved
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|-------|------|-----|-------------|
| Bit 7 | - | 1 | Reserved |
| Bit 6 | - | 1 | Reserved |
| Bit 5 | - | 1 | Reserved |
| Bit 4 | - | 1 | Reserved |
| Bit 3 | - | 1 | Reserved |
| Bit 2 | - | 1 | Reserved |
| Bit 1 | - | 1 | Reserved |
| Bit 0 | - | 1 | Reserved |

Byte 5: Reserved
(1= enable, 0 = disable)

| BIT | PIN# | PWD | DESCRIPTION |
|------|------|-----|-----------------|
| Bit7 | - | 0 | Reserved (Note) |
| Bit6 | - | 0 | Reserved (Note) |
| Bit5 | - | 0 | Reserved (Note) |
| Bit4 | - | 0 | Reserved (Note) |
| Bit3 | - | 0 | Reserved (Note) |
| Bit2 | - | 1 | Reserved (Note) |
| Bit1 | - | 1 | Reserved (Note) |
| Bit0 | - | 0 | Reserved (Note) |

Note: Don't write into this register, writing into this register can cause malfunction



Absolute Maximum Ratings

| | |
|-------------------------------|-------------------------------------|
| Supply Voltage (VDD & AVDD) | -0.5V to 3.6V |
| Logic Inputs | GND-0.5 V to V _{DD} +0.5 V |
| Ambient Operating Temperature | 0°C to +85°C |
| Storage Temperature | -65°C to +150°C |

Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only and functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Electrical Characteristics - Input/Supply/Common Output Parameters

T_A = 0 - 85°C; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------------------------|--------------------|--|-----|-----|-----|-------|
| Input High Current | I _{IH} | V _I = VDD or GND | | | | μA |
| Input Low Current | I _{IL} | V _I = VDD or GND | | | | μA |
| Operating Supply Current | I _{DD2.5} | CL = 0pf | | | | mA |
| | I _{DDPD} | CL = 0pf | | | 100 | μA |
| Output High Current | I _{OH} | VDD = 2.3V, V _{OUT} = 1V | -18 | | | mA |
| Output Low Current | I _{OL} | VDD = 2.3V, V _{OUT} = 1.2V | 26 | | | mA |
| High Impedance Output Current | I _{OZ} | VDD=2.7V, V _{out} =VDD or GND | | | ±10 | μA |
| Input Clamp Voltage | V _{IK} | I _{in} = -18mA | | | | V |
| High-level output voltage | V _{OH} | VDD = min to max, I _{OH} = -1 mA | | | | V |
| | | VDD = 2.3V, I _{OH} = -12 mA | | | | V |
| Low-level output voltage | V _{OL} | VDD = min to max I _{OL} =1 mA | | | 0.1 | |
| | | VDD = 2.3V I _{OH} =12 mA | | | 0.6 | V |
| Input Capacitance ¹ | C _{IN} | V _I = GND or VDD | | | | pF |
| Output Capacitance ¹ | C _{OUT} | V _{OUT} = GND or VDD | | 3 | | pF |

¹Guaranteed by design, not 100% tested in production.



Recommended Operating Condition

$T_A = 0 - 85^\circ\text{C}$; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|-------------------|----------------------|---------------------------------|-----|---------------------------------|-------|
| Analog/core supply voltage | V_{DD}, A_{VDD} | | 2.3 | 2.5 | 2.7 | V |
| | V_{DDI2C} | | 2.3 | | 3.6 | V |
| Input voltage level | V_{IL} | | -0.3 | | $V_{DD}-0.4$ | V |
| | V_{IH} | | 0.4 | | $V_{DD}+0.3$ | V |
| Input differential-pair voltage swing ¹ | V_{ID} | DC - CLK_INT, FB_INT | 0.36 | | $V_{DDQ} + 0.6$ | V |
| | | AC - CLK_INT, FB_INT | 0.5 | | $V_{DDQ} + 0.6$ | V |
| Input differential-pair crossing voltage | V_{IC} | | $0.45 \times (V_{IH} - V_{IL})$ | | $0.55 \times (V_{IH} - V_{IL})$ | V |
| Output differential-pair crossing voltage | V_{OC} | | | | | V |

¹ Differential inputs signal voltages specifies the differential voltage [VTR - VCP] required for switching, where VT is the true input level and VCP is the complementary input level.

Timing Requirements

$T_A = 0 - 85^\circ\text{C}$; Supply Voltage AVDD, VDD = 2.5 V +/- 0.2V (unless otherwise stated)

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS |
|---------------------------|--------------------|------------------------------------|-----|-----|---------------|
| Operating clock frequency | freq_{op} | | 66 | 233 | MHz |
| Input clock duty cycle | d_{in} | | 40 | 60 | % |
| CLK stabilization | T_{STAB} | from VDD = 3.3V to 1% target freq. | | 100 | μs |

Switching Characteristics

| PARAMETER | SYMBOL | CONDITION | MIN | TYP | MAX | UNITS |
|--------------------------------|---------------------|---------------------------|------|-----------|-----|-------|
| Jitter; Half Period | T_{jabs} | 100/125/133/167/233MHz | -75 | 50 | 75 | ps |
| Cycle to Cycle Jitter1 | $T_{cyc} - T_{cyc}$ | 100/125/133/167/233MHz | | 40 | 65 | ps |
| Output to Output Skew | T_{skew} | | | 75 | 100 | ps |
| Pulse skew | T_{skewp} | | | | 100 | ps |
| Duty cycle | D_C^2 | 66MHz to 100MHz | 45 | 49.8 | 50 | % |
| | | 101MHz to 167/233MHz | 45 | 49.7 | 50 | % |
| Slew Rate | | | | | | |
| Condition: 133 MHz, CL = 15 pF | | | 1 | 1.8 | 2 | v/ns |
| Condition: 166 MHz, CL = 15 pF | | | 1 | 1.85 | 2 | v/ns |
| Dynamic Phase Error | | | -150 | ± 100 | 150 | ps |
| Static Phase Error | | | -150 | ± 60 | 150 | ps |
| Rise Time, Fall Time | t_r, t_f | Load = 120 Ω /16pF | 650 | 800 | 950 | ps |

Notes:

- Refers to transition on noninverting output.
- While the pulse skew is almost constant over frequency, the duty cycle error increases at higher frequencies. This is due to the formula: duty cycle = t_{wH}/t_c , where the cycle (t_c) decreases as the frequency goes up.



General I²C serial interface information

The information in this section assumes familiarity with I²C programming.
For more information, contact ICS for an I²C programming application note.

How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address D2_(H)
- ICS clock will *acknowledge*
- Controller (host) sends a dummy command code
- ICS clock will *acknowledge*
- Controller (host) sends a dummy byte count
- ICS clock will *acknowledge*
- Controller (host) starts sending first byte (Byte 0) through byte 5
- ICS clock will *acknowledge* each byte *one at a time*.
- Controller (host) sends a Stop bit

| How to Write: | |
|---------------------------|----------------------|
| Controller (Host) | ICS (Slave/Receiver) |
| Start Bit | |
| Address D2 _(H) | |
| | ACK |
| Dummy Command Code | |
| | ACK |
| Dummy Byte Count | |
| | ACK |
| Byte 0 | |
| | ACK |
| Byte 1 | |
| | ACK |
| Byte 2 | |
| | ACK |
| Byte 3 | |
| | ACK |
| Byte 4 | |
| | ACK |
| Byte 5 | |
| | ACK |
| Stop Bit | |


How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the read address D3_(H)
- ICS clock will *acknowledge*
- ICS clock will send the *byte count*
- Controller (host) acknowledges
- ICS clock sends first byte (*Byte 0*) through *byte 5*
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a stop bit

| How to Read: | |
|---------------------------|----------------------|
| Controller (Host) | ICS (Slave/Receiver) |
| Start Bit | |
| Address D3 _(H) | |
| | ACK |
| | Byte Count |
| ACK | |
| | Byte 0 |
| ACK | |
| | Byte 1 |
| ACK | |
| | Byte 2 |
| ACK | |
| | Byte 3 |
| ACK | |
| | Byte 4 |
| ACK | |
| | Byte 5 |
| ACK | |
| Stop Bit | |

Notes:

1. The ICS clock generator is a slave/receiver, I²C component. It can read back the data stored in the latches for verification. **Read-Back will support Intel PIIX4 "Block-Read" protocol.**
2. The data transfer rate supported by this clock generator is 100K bits/sec or less (standard mode)
3. The input is operating at 3.3V logic levels.
4. The data byte format is 8 bit bytes.
5. To simplify the clock generator I²C interface, the protocol is set to use only "**Block-Writes**" from the controller. The bytes must be accessed in sequential order from lowest to highest byte with the ability to stop after any complete byte has been transferred. The Command code and Byte count shown above must be sent, but the data is ignored for those two bytes. The data is loaded until a Stop sequence is issued.
6. At power-on, all registers are set to a default condition, as shown.

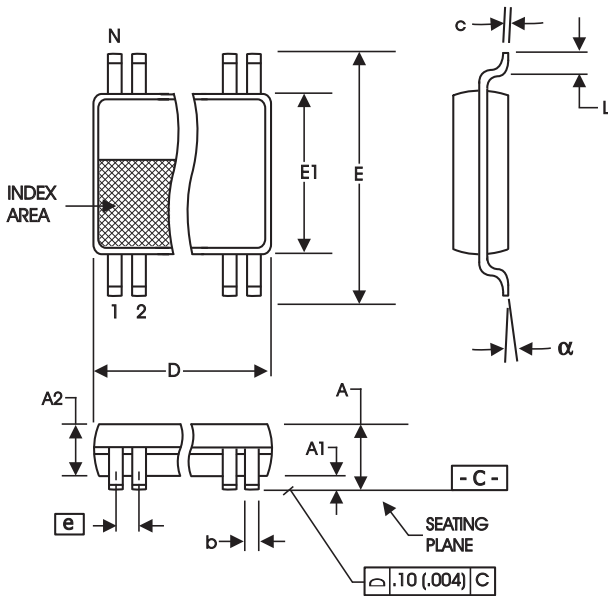

| SYMBOL | In Millimeters | | In Inches | |
|----------|-------------------|-------------------|-------------------|-------------------|
| | COMMON DIMENSIONS | COMMON DIMENSIONS | COMMON DIMENSIONS | COMMON DIMENSIONS |
| | MIN | MAX | MIN | MAX |
| A | -- | 2.00 | -- | .079 |
| A1 | 0.05 | -- | .002 | -- |
| A2 | 1.65 | 1.85 | .065 | .073 |
| b | 0.22 | 0.38 | .009 | .015 |
| c | 0.09 | 0.25 | .0035 | .010 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 7.40 | 8.20 | .291 | .323 |
| E1 | 5.00 | 5.60 | .197 | .220 |
| e | 0.65 BASIC | | 0.0256 BASIC | |
| L | 0.55 | 0.95 | .022 | .037 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| α | 0° | 8° | 0° | 8° |

VARIATIONS

| N | D mm. | | D (inch) | |
|----|-------|-------|----------|------|
| | MIN | MAX | MIN | MAX |
| 28 | 9.90 | 10.50 | .390 | .413 |

Reference Doc.: JEDEC Publication 95, MO-150

10-0033

Ordering Information

ICS93716yF-T

Example:

ICS XXXX y F - PPP - T

Designation for tape and reel packaging

Pattern Number (2 or 3 digit number for parts with ROM code patterns)


Package Type
F=SSOP

Revision Designator (will not correlate with datasheet revision)

Device Type

Prefix

ICS, AV = Standard Device

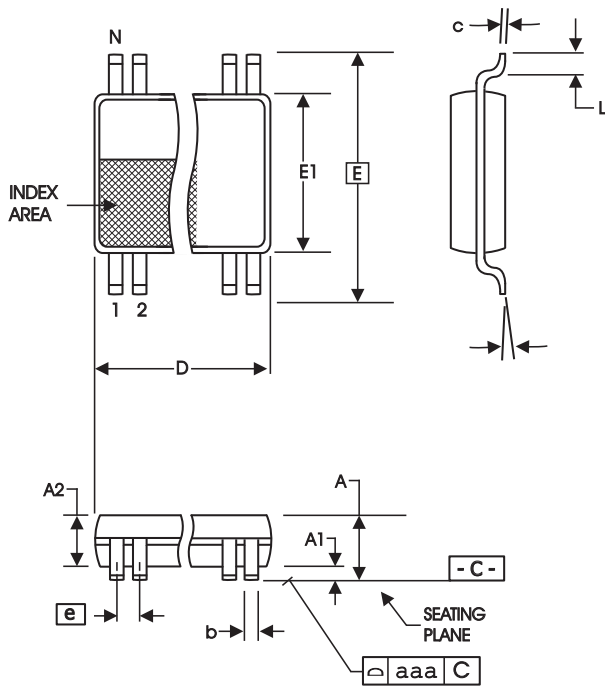

| SYMBOL | In Millimeters COMMON DIMENSIONS | | In Inches COMMON DIMENSIONS | |
|----------|-------------------------------------|------|--------------------------------|------|
| | MIN | MAX | MIN | MAX |
| A | -- | 1.20 | -- | .047 |
| A1 | 0.05 | 0.15 | .002 | .006 |
| A2 | 0.80 | 1.05 | .032 | .041 |
| b | 0.17 | 0.27 | .007 | .012 |
| c | 0.09 | 0.20 | .0035 | .008 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 8.10 BASIC | | 0.319 BASIC | |
| E1 | 6.00 | 6.20 | .236 | .244 |
| e | 0.65 BASIC | | 0.0256 BASIC | |
| L | 0.45 | 0.75 | .018 | .030 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| α | 0° | 8° | 0° | 8° |
| aaa | -- | 0.10 | -- | .004 |

VARIATIONS

| N | D mm. | | D (inch) | |
|----|-------|------|----------|------|
| | MIN | MAX | MIN | MAX |
| 28 | 9.60 | 9.80 | .378 | .386 |

Reference Doc.: JEDEC Publication 95, MO-153

10-0039

6.10 mm. Body, 0.65 mm. pitch TSSOP
(240 mil) (25.6 mil)

Ordering Information

ICS93716yG-T

Example:

ICS XXXX y G - PPP - T

